



SciBrite®
by Percival Scientific

LED Plant Growth

Percival® model LED-30L1

Standard SciBrite® LED lighting

Applications

- Specifically designed for plant growth light quality studies and other experiments requiring specific light wavelengths

IntellusUltra Controller

The IntellusUltra (C8T) control system adapts to nearly any programming style with a large range of options for optimal control over experiments.


- Robust and reliable, industrial-grade integrated hardware design
- Highly flexible programming capabilities for customized configurations and expansion
- Precise, simultaneous control of up to 7 environmental parameters
- Industry-leading experiment protection and system diagnostics

IntellusUltra Touchscreen Interface

This high-resolution touchscreen displays advanced settings and data for fine-tuning experiments, including graphs and charts.

- 10.1" IPS, high resolution display with 10-point multi-touch sensitivity
- Tabular and graphical presentation of chamber programs and parameters
- Highly visible process values and alarm notifications
- Enhanced user feedback menus

Please visit www.percival-scientific.com for more information on our control systems.

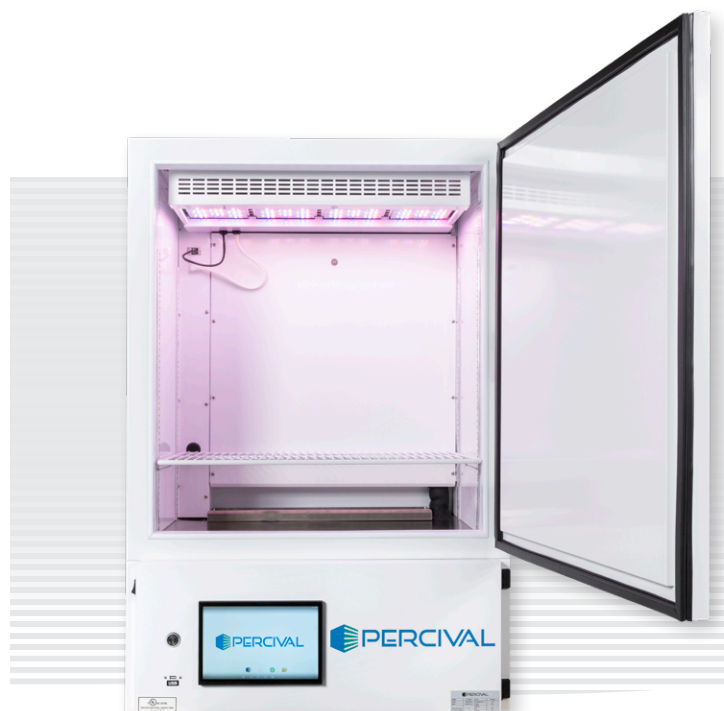

SciBrite LED Lighting System

- Included SciBrite colors (standard):
 - Warm White (3500K)
 - Red (650-670nm)
 - Blue (451nm)
 - Far Red (720-740nm)
 - Intensity programmable up to 1400 $\mu\text{moles/m}^2/\text{s}$ of light radiance measured @ 6" (15 cm) from LEDs at 24°C and up to 950 $\mu\text{moles/m}^2/\text{s}$ @ 20" (50 cm) from LEDs at 24°C
 - Intensity breakdown by LED type:
 - Warm White (3500K) LEDs = 31.7%
 - Red (650-670nm) LEDs = 29.5%
 - Blue (451nm) LEDs = 23.8%
 - Far Red (720-740nm) LEDs = 15%
 - Open-loop dimmable system with output from 1-100% in one-percent increments
 - Each color on each tier is independently dimmable
- Please contact Percival Scientific for available LED color choices. Color changes will impact the intensities listed above.

LED-30L1 specifications (subject to change without notice)

Temp Range with all lights on	Interior Space volume		Total Shelving Floor Area		Maximum Growing Height		Exterior Dimensions						Light Intensity 6" from lamps unless otherwise noted	Tiers	LED Colors
							width		depth		height				
°C	ft³	m³	ft²	m²	in	cm	in	cm	in	cm	in	cm	µmoles/m²/s		
10-44±0.5	9.6	0.3	3	0.3	25.5	64.8	31	78.7	24.5	62.2	46.2	117.3	1400	1	4*

SciBrite® LED Plant Growth Percival model LED-30L1

Airflow/Circulation

- Direction: vertical
- Airspeed fpm (feet per minute): 60

Cabinet Construction

- Interior constructed of 26-gauge galvanized steel
- Interior floor constructed of 24-gauge polished stainless steel
- Exterior constructed of 24-gauge Galvannealed extra-smooth steel
- NSF-compliant seam design
- Chamber is completely self-contained, suitable for stacking one above the other
- Overall wall thickness is 2" (5.1 cm)
- Highly durable and reflective white coating

Door

- One door opening of 26.8" x 29.8" (67.9 cm x 75.6 cm) provides full access to chamber interior
- Magnetic gasket provides a tight seal to door frame

Interior Space

- 9.6 ft³ (0.3 m³) with work area of 3 ft² (0.3 m²) provided on one tier

Shelving

- One tier of white epoxy coated steel wire shelving (shelf is 16.5"W x 26.5"D [41.9 cm x 67.3 cm])
- Shelf is supported by shelf clips allowing ½" vertical adjustments
- Maximum growing height is 25.5" (64.8 cm)

Refrigeration

- Self-contained air-cooled condensing unit with hot gas bypass system (continuous running condensing unit ensures precise temperature control by alternately cycling refrigerant and hot gas to coil; this also prolongs life of compressor and eliminates risk of ice buildup in coil)
- Extended stem solenoid valves for quiet and long life operation
- Heat rejection to ambient (standard chamber) = 1,785 BTU/hr

Temperature Range

- 10°-44°C (±0.5°C) lights on and 2°-44°C (±0.5°C) lights off

Temperature Safety Limit Controls

- Experiment protection (adjustable high/low temperature control, audible alarms and visual indicators)
- Controls shut down all power to the chamber, activating alarms
- System automatically resets when temperature returns to normal range

Humidity Control (optional)

- Ultrasonic humidifier with advanced RH sensor (H11)
- Ultrasonic humidifier and dehumidifier with advanced RH sensor (H12)
- Ultrasonic humidifier with electronic RH sensor (H14)
- Ultrasonic humidifier and dehumidifier with electronic RH sensor (H15)

See other specification sheets or contact Percival Scientific for additional information.

Options (most popular)

- IntellusUltra Connect (C9)
- Additive CO₂ control
- CO₂ removal system
- Self-contained water-cooled condensing unit
- Dry alarm contacts
- Extended temperature ranges available
- Convenience receptacles

Contact info@percival-scientific.com for additional information.

Electrical Service Requirements

- 120/1/60 with NEMA 5-15P plug provided (with standard chamber)
- RLA=10 (MCA=12.5)

Regulatory Standards

- Electrical Safety: UL-508A, certified and labelled by Percival Scientific under UL file number E340161
- Quality System: ISO 9001:2015, certified under DQS, Inc. under certification number 10017261

Helping You Create Better Science

Percival Scientific controlled environment systems are the culmination of over 60 years of design and manufacturing experience. We developed our high-quality products through direct partnerships within the scientific community. Our controlled environments are known for their customizable designs and superior, long-lasting performance. Creativity, passion, technical expertise and attention to detail drive our scientific innovation, and we are proud to help you create better science.



Percival Scientific, Inc.

505 Research Drive • Perry, IA 50220 USA

800.695.2743 • 515.465.9363 • Fax: 515.465.9464

www.percival-scientific.com